Benchmark

BMG460



SINGLE-USE POWDER FREE NITRILE GLOVE

Lightweight, powder-free, single-use gloves with textured fingertips. Provides a very good alternative to Vinyl gloves.

FEATURES

- > Textured finish on the fingertips to enhance grip
- > Comfortable with a 'second skin' feel
- > Latex and powder-free
- > Approved for food handling
- > Beaded cuff
- > AQL 1.5
- > Medical device compliant (MDD 93/42/EEC)
- > Thickness 0.07mm



SUITABLE FOR


Typical Industries

- AerospaceChemical
- ChemicalElectronics
- Food
- Pharmaceutical
- Manufacturing
- Oil and Gas

Suitable Applications

- Chemical Handling
- Food Handling
- Handling Oily Components
- Laboratory Analysis
- Light Assembly
- Paint Spraying

CERTIFICATION

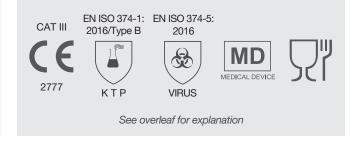

Benchmark

BMG460



PRODUCT INFORMATION

MATERIAL	Nitrile
COLOUR	Blue
LENGTH (mm)	240
CUFF STYLE	Beaded

ORDERING DETAILS

SIZE	ITEM NO.	PACKAGING
6½-7 / S 7½-8 / M 8½-9 / L 9½-10 / XL 10½-11 XXL	BMG00460DD BMG00460DF BMG00460DH BMG00460DJ BMG00460DL	Boxes of 100 pcs, 10 boxes per case

RECOMMENDATIONS FOR USE

USE: Single use glove. Not suitable for thermal, electrical, heavy chemical protection. Do not use near moving machines if there is a risk of entanglement.

STORAGE: Store in dry conditions in the original packaging and away from direct sunlight.

CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.

LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use .

PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)

CERTIFICATION LEGENDS

)	

н

RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374: 2016

40% Hydrofluoric acid 37% Formaldehyde

CODE CHEMICAL CODE CHEMICAL n-Heptane Methanol J Sodium hydroxide 40%

Α	Methanol	J	n-Heptane
В	Acetone	Κ	Sodium hydroxide 40%
С	Acetonitrile	L	Sulphuric acid 96%
D	Dichloromethane	Μ	65% Nitric acid
Е	Carbon Disulfide	Ν	99% Acetic acid
F	Toluene	0	25% Ammonium hydro
G	Diethylamine	Р	30% Hydrogen peroxid

Tetrahydrofurane S

Ethyl acetate	Т

EN455-1:	Freedom from holes
EN455-2:	Physical properties
EN455-3:	Biological evaluation
EN455-4:	Shelf Life

6	TYPE OF GLOVES	BREAKTHROUGH TIME
0	А	≥30 min for at least 6 chemicals
oxide de	В	≥30 min for at least 3 chemicals
	С	≥10 min for at least 1 chemical

 \mathfrak{B}

FOOD CONTACT DIRECTIVE EC 10/2011



LabTeam Scandinavia AB Adress Vasatorpsvägen 1 SE-254 57 Helsingborg Sverige

Telefon Direkt 042-300 91 32

Kundtjänst 042-300 91 30 Stockholm 08-400 200 42 Göteborg 031-277 001 Danmark 36 98 02 30

Mail labteamet@labteamet.com Order order@labteamet.com Service service@labteamet.com

Labutrustning • Service • Kvalitet

Web www.labteamet.com

BMK-DATA-BMG460-0621 1

EC compliance certificate delivered by the notified body, CTC, 4, rue Hermann Frenkel, 69367 Lyon Cedex 07, France (Notified Body No. 0075)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.